


- Compact & Lightweight chassis
- Charge amplifier via BNC Input/Output connectors
- Individual channel gain selection x1, x10, x100
- Power on indication
- ± 10 VAC output
- DC powered, AC Mains adaptor supplied
- Earth/Floating switch

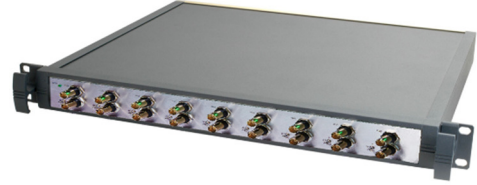

The 9X-C is a 9 channel charge amplifier/signal conditioning unit, housed in a compact and rugged 1U high 19" rack mount chassis. Featuring DC power input it can be used via the supplied mains DC adaptor or via a field based DC supply such as battery.

Each channel has independent gain control x1, x10, x100 and inputs and output connections are via front panel BNC connectors, making connection quick and simple.

Specification		
Channels	9	
Power Input	9 – 30 Volts DC, 5 Watt. (nominal 18VDC)	
Power connection	2.1mm DC Socket	
Signal Connections	BNC Jacks - Input and Outputs on front panel	
Indicators - Power	External LED indicator shows correct power to unit	
Floating or Ground	Selectable via rear panel switch	
Signal level output	+/- 10 VAC pk-pk	
Dimensions	390 x 482 x 44 mm	
Weight	2.7kg	
Operating Temp.	0 to 45 °C, non-condensing.	
Broadband Electrical Noise	(1 to 10,000Hz) (Gain x1)	48.1 μ Vrms
	(1 to 10,000Hz) (Gain x10)	52.7 μ Vrms
	(1 to 10,000Hz) (Gain x100)	272 μ Vrms
Bandwidth	Gain x1	500kHz
Bandwidth	Gain x10	500kHz
Bandwidth	Gain x100	100kHz

Due to continued product development Kemo Limited reserve the right to change specification without notice.