
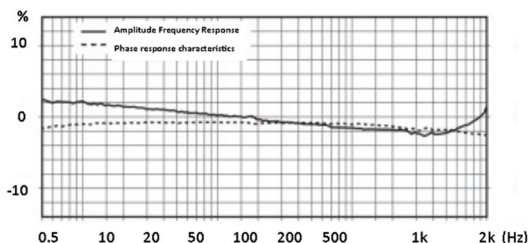
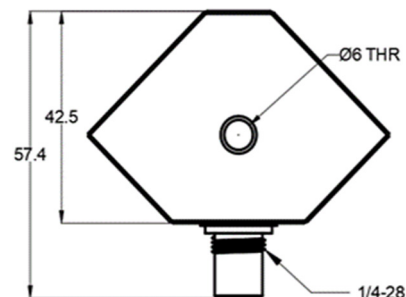


- Triaxial IEPE Accelerometer
- Sensitivity – 1000mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 158grams
- 1/4-28UNF side entry 4 pin connector
- Through hole mounting

The HVT1KS-H is a high sensitivity triaxial IEPE accelerometer for the measurement of low amplitude vibration below $\pm 5g$ in three axes. With a through hole mounting solution the accelerometer can be positioned with the connector pointing in the direction required. Ideal for ground borne and structural vibration surveys.

Specification	Metric	Imperial
Sensitivity	102.4mV/(m/s ²)	1000mV/g
Measurement Range (pk)	$\pm 49m/s^2$	$\pm 5g$
Frequency Range $\pm 10\%$	(Z) 0.4 to 2200Hz (Y,X) 0.5 to 1900Hz	
Resonant Frequency	≥ 10 kHz	
Non-Linearity	≤ 1 %	
Transverse Sensitivity	≤ 5 %	
Electrical Noise Floor	0.0001m/s ² rms	0.00001g rms
Overload Limit (Shock)	$\pm 980(m/s^2)pk$	$\pm 100gpk$
Operating Temp. Range	-55 to +125°C	-67 to +257°F
Compliance Voltage (Supply)	+18 to +28 VDC	
Current range	2 – 10mA	
Output Bias Voltage	11VDC \pm 1.5VDC	
Size (excluding connector)	45x45x21 (mm)	1.77x1.77x0.82 (in)
Weight	158gm	5.57oz
Sensing Geometry	Shear	
Sensing Element Material	PZT-5	
Case Material	Titanium	
Connector Position	Side	
Case sealing	Hermetic	
Electrical Connection Type	1/4-28UNF 4 pin	
Mounting	$\varnothing 6mm$ (0.24") through hole	

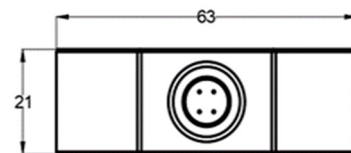

Kemo has a range of cable assemblies available for use with the HVT1KS-H

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

Unit 1, Dene Yard
Green Street Green Road,
Dartford, Kent. DA2 8DH

www.kemo.com sales@kemo.com