

- Stud for accelerometer mounting
- Stainless steel 303S31
- -70°C to +200°C range
- 10/32UNF to 1/4-28UNF thread
- Non-isolated



The KMS-1028 is a stud for the direct screw mounting of an accelerometer.


The threads are 10/32UNF and 1/4-28UNF.

The stud can be used in either direction depending on the thread requirements of the mount and accelerometer.

The KMS-1028 can also be used in conjunction with the following mounts as adaptor studs:

KMMAG-21
KMISO-ADH

Recommended mounting torque 1.2Nm

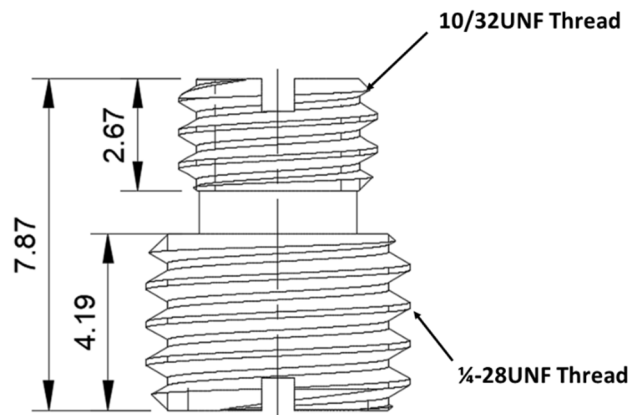

Due to continued product development Kemo Limited reserve the right to change specification without notice.

Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom

+44 (0)1474 705168

www.kemo.com sales@kemo.com