




- General Purpose Piezoelectric Accelerometer
- Shear design
- Piezoelectric ceramic PZT-5
- Sensitivity – 50pC/g
- Mass - 22grams
- 10-32UNF top entry connector
- Use with a Low noise cable

The GC50T-T is a general purpose monoaxial piezoelectric accelerometer with a top entry 10/32UNF microdot connector.

The base of the accelerometer has a tapped hole with a 10/32UNF thread for compatibility with many industry applications.

Featuring a shear design PZT-5 sensing element the GC50T-T is supplied with a standard 10/32UNF mounting stud (other studs are available on request).

Specification	Metric	Imperial
Sensitivity	5.10pC/(m/s ²)	50pC/g
Measurement Range (pk)	±9800m/s ²	±1000g
Frequency Range ±10%	6000 Hz	
Resonant Frequency	≥25 kHz	
Non-Linearity	≤1 %	
Transverse Sensitivity	≤5 %	
Overload Limit (Shock)	±49033(m/s ²)pk	±5000gpk
Operating Temp. Range	-54 to +150°C	-65 to +302°F
Polarity ↑	Positive	
Capacitance	700 pF	
Insulation Resistance	>1X10 ¹¹ Ω	
Size (excluding connector)	16(A/F)x25 mm	0.63"(A/F)x1.0"
Weight	22gm	0.77oz
Sensing Geometry	Shear	
Sensing Element Material	PZT-5	
Case Material	Titanium	
Connector Position	Top	
Case sealing	Welded	
Electrical Connection Type	10-32UNF Microdot	
Mounting Thread (tapped base)	10-32UNF	
Mounting Torque	3Nm	26in/lb

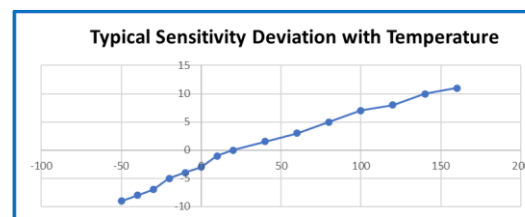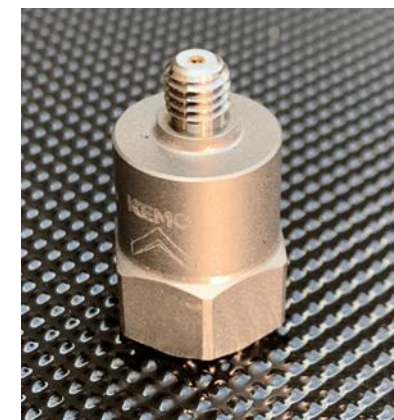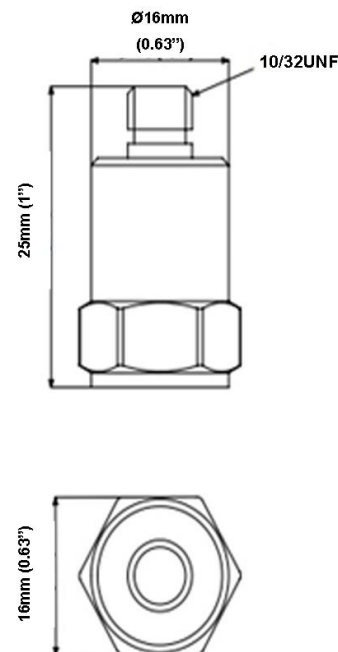

It is recommended that the GC50T-T is used with a low noise cable from Kemo's range to reduce triboelectric noise.

1A2-30 – 3m(10ft) 10/32UNF microdot to BNC plug
 1A2-50 – 5m(15ft) 10/32UNF microdot to BNC plug
 1A1-30 – 3m(10ft) 10/32UNFmdot to 10/32UNFmdot
 1A1-50 – 5m(15ft) 10/32UNFmdot to 10/32UNFmdot

Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom
 +44 (0)1474 705168

www.kemo.com sales@kemo.com

Iss.1 – February 2022