

- Inline Charge to Voltage Converter
- 1mV/pC
- Gain x1
- Mass – 3grams
- 10-32UNF connectors
- Miniature
- Compact design


The C2V-1 is an inline charge converter with a conversion of 1mV per pC this is a gain of 1. This allows the use of a piezoelectric charge output accelerometer without the need of a charge amplifier. The C2V-1 uses the IEPE signal conditioning from the DAQ or vibration control system hardware to power the charge to voltage conversion.

Kemo can also supply a range of cable solutions to use with the C2V-1

Other options also include: C2V-0.1 (0.1mV/pC) and C2V-10 (10mV/pC)



Specification	Metric	Imperial
Sensitivity	1mV/pC	1mV/pC
Input Range	±4,000pC	±4,000pC
Frequency Range ±1dB	0.5 to 20000 Hz	
Overload limit	±8V	
Non-Linearity	≤1 %	
Electrical Noise	0.1mV rms	
Overload Limit (Shock)	±49000(m/s²) pk	±5000gpk
Operating Temp. Range	-55 to +125°C	-67 to +257°F
Output voltage	±5VAC	
Compliance Voltage (Supply)	+18 to +28 VDC	
Current range	2 – 10mA	
Output Bias Voltage	11VDC ± 1.5VDC	
Output Impedance	≤100Ω	
Size (excluding connector)	Ø6mmx37mm	Ø0.23"x1.45"
Weight	3gm	0.105oz
Sensing Element Material	PZT-5	
Case Material	Stainless Steel	
Case sealing	Welded	
Electrical Connection Type	10-32UNF Microdot / 10-32UNF Microdot	

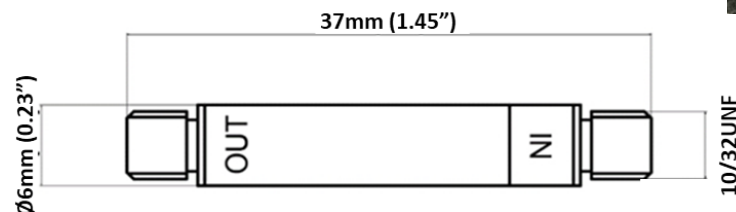

Kemo has a range of cable assemblies available for use with the C2V-1

1A2-30 – 3m(10ft) low noise 10/32UNF microdot to BNC plug  
 1A2-50 – 5m(15ft) low noise 10/32UNF microdot to BNC plug  
 1A1-30 – 3m(10ft) low noise 10/32UNFmdot to 10/32UNFmdot  
 1A1-50 – 5m(15ft) low noise 10/32UNFmdot to 10/32UNFmdot

### Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom  
 +44 (0)1474 705168

[www.kemo.com](http://www.kemo.com) [sales@Kemo.com](mailto:sales@Kemo.com)

Iss.1 – November 2022