
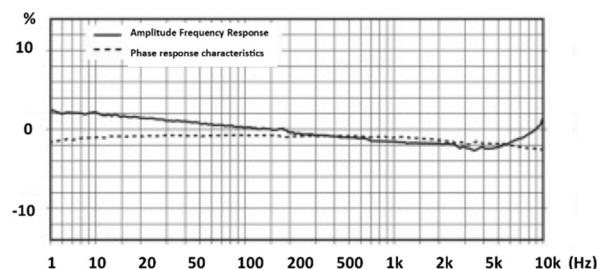
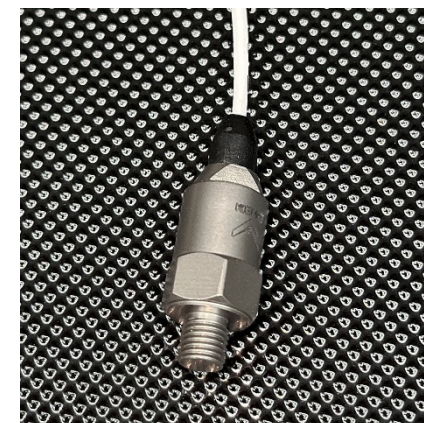


- Shock IEPE Accelerometer
- Shear design
- Piezoelectric ceramic PZT-5
- Range ±20000g
- Mass – 6.5grams
- 1m Integral cable
- M6 integral stud

The VS-20K is an IEPE shock measurement accelerometer offering dedicated shock measurement capability. With a ±20000g range the VS-20K combines the flexibility of IEPE (Integrated Electronics Piezoelectric) technology with the reliability of a robust titanium fully welded construction. Kemo can also offer cables and signal conditioning solutions for use with their full range of accelerometers.

Specification	Metric	Imperial
Sensitivity	0.025mV/(m/s²)	0.25mV/g
Measurement Range (pk)	±196000m/s²	±20000g
Frequency Range ±10%	1 to 20000 Hz	
Resonant Frequency	≥75 kHz	
Non-Linearity	≤1 %	
Transverse Sensitivity	≤5 %	
Overload Limit (Shock)	±294000(m/s²) pk	±30000gpk
Operating Temp. Range	-55 to +120°C	-67 to +248°F
Polarity ↑	Positive	
Compliance Voltage (Supply)	+18 to +28 VDC	
Current range	2 – 20mA	
Output Bias Voltage	11VDC ± 1.5VDC	
Output Impedance	≤100Ω	
Size (excluding connector)	11mmA/Fx16 mm	0.43" A/Fx0.63"
Weight	6.5gm	0.23oz
Sensing Geometry	Shear	
Sensing Element Material	PZT-5	
Case Material	Titanium	
Connector Position	Top	
Case sealing	Laser Welding	
Electrical Connection Type	1m Int. Cable ends in 10/32UNF male plug	
Mounting	M6x0.75 integral stud	

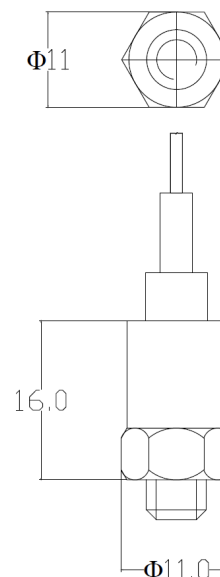

Kemo has a range of cable assemblies available for use with the VS-20K and other IEPE accelerometers.

1B2-30 – 3m(10ft) 10/32UNF microdot to BNC plug
 1B2-50 – 5m(15ft) 10/32/UNF microdot to BNC plug
 1B1-30 – 3m(10ft) 10/32UNFmdot to 10/32UNFmdot
 1B1-50 – 5m(15ft) 10/32UNFmdot to 10/32UNFmdot

Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom
 +44 (0)1474 705168

www.kemo.com sales@kemo.com

Iss.2 – May 2026